


# Guide rails



**Rolling grilles**  
**Folding grilles**  
**Spring shafts**  
**Rolling shutters**

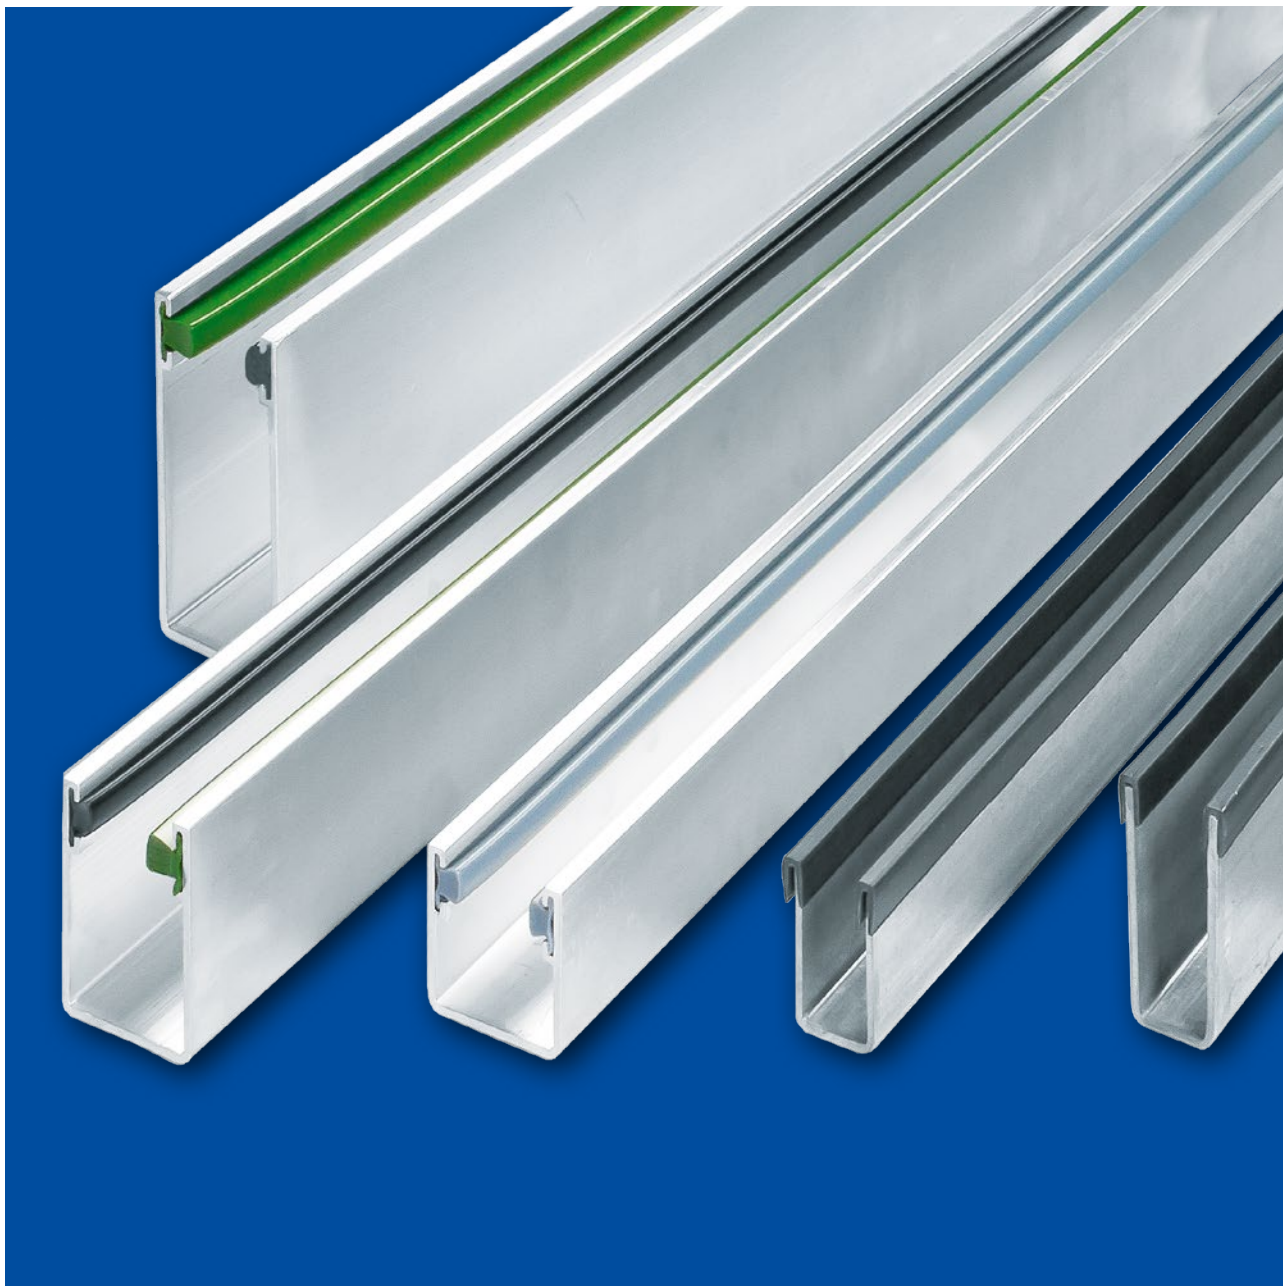

Always up to date  
as a member of  
BVT





**low-noise and wear-reducing thanks to plastic sliding rails**

**available in stock lengths, fixed length or ready for installation**

Design	Profile dimensions	Stock lengths	Clear widths
Galvanized steel with/without edge protection	50 / 25 / 50 / 3 mm	12 m	approx. 15/19 mm
Galvanized steel with/without edge protection	50 / 30 / 50 / 3 mm	12 m	approx. 20/24 mm
Galvanized steel with/without edge protection	50 / 35 / 50 / 3 mm	12 m	approx. 25/29 mm
Galvanized steel with/without edge protection	70 / 30 / 70 / 3 mm	12 m	approx. 20/24 mm
Galvanized steel with/without edge protection	80 / 35 / 80 / 3 mm	12 m	approx. 25/29 mm
Galvanized steel with/without edge protection	100 / 35 / 100 / 3 mm	6 m	approx. 25/29 mm
Galvanized steel with/without edge protection	120 / 35 / 120 / 3 mm	6 m	approx. 25/29 mm
Galvanized steel with/without edge protection	140 / 35 / 140 / 3 mm	6 m	approx. 25/29 mm
Stainless steel	50 / 30 / 50 / 3 mm	4 m	approx. 24 mm
Stainless steel	70 / 30 / 70 / 3 mm	6 m	approx. 24 mm
Stainless steel	80 / 34 / 80 / 3 mm	6 m	approx. 28 mm
Aluminium with sliding strips	50 / 32 / 50 / 3,5 mm	7 m	approx. 15 - 18 mm*
Aluminium with sliding strips	50 / 51 / 50 / 3,5 mm	12 m	approx. 16,5 - 28 mm**
Aluminium with sliding strips	60 / 51 / 60 / 3,5 mm	12 m	approx. 16,5 - 28 mm**
Aluminium with sliding strips	70 / 51 / 70 / 3,5 mm	12 m	approx. 16,5 - 28 mm**
Aluminium with sliding strips	80 / 51 / 80 / 3,5 mm	12 m	approx. 16,5 - 28 mm**
Aluminium with sliding strips	100 / 51 / 100 / 3,5 mm	12 m	approx. 16,5 - 28 mm**

\* clear width for sliding strips black/black = 18; black/grey = 16; grey/grey = 15 mm

\*\* clear width for sliding strips black/black = 28; black/grey = 26; black/green = 22 mm; green/green = 16,5; green/grey = 20; grey/grey = 24 mm

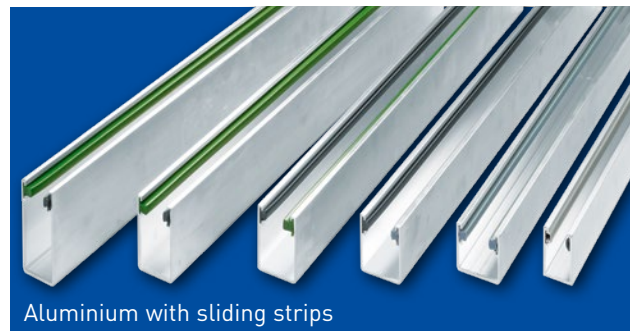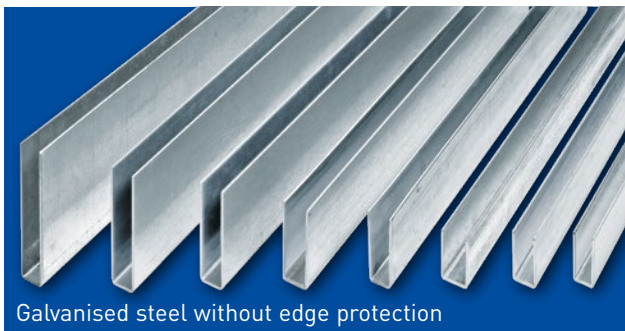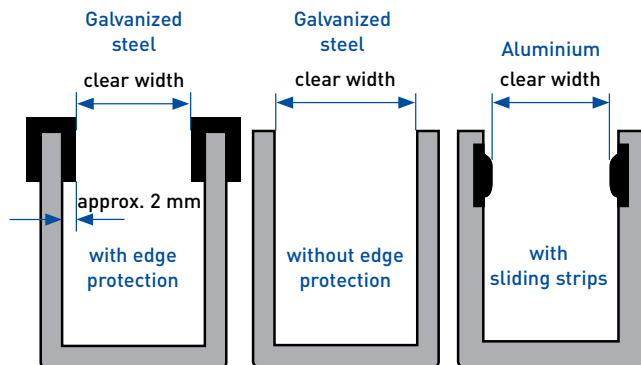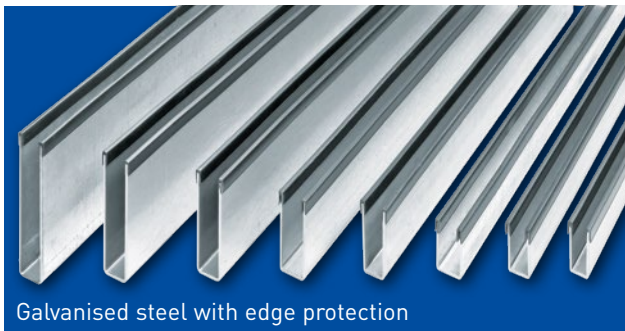

**OCO** | Rolling grilles  
Folding grilles  
Spring shafts  
Rolling shutters

OCO Oesterheld GmbH

Glockenstahlstraße 8 · 42855 Remscheid  
Telephone +49 (0) 2191 9050 · Fax +49 (0) 2191 90518  
info@ocoesterheld.de · [www.ocoesterheld.de](http://www.ocoesterheld.de)

your specialist